



HARD MAGNETIC MATERIALS

AMH-500

AMH-500 is a DC automatic measuring system for characterization of hard magnetic materials, such as Alnico, Ferrite, NdFeB, SmCo and bonded magnets. Measurements are performed at temperature ranging from ambient up to 220°C with special heating poles.

AMH - 500 HYSTERESISGRAPH

DESCRIPTION

The AMH-500 meets International Standard IEC 60404-5 and ASTM A977: measurement of magnetically hard materials in closed circuit using an electromagnet.

KEY BENEFITS

- Remanence B_r , coercivity H_cB , H_cJ , max energy product BH_{max} , H_{knee} , recoil permeability (μ_{recoil}), etc.
- Temperature measurements from ambient up to 220 °C
- Automatic measurement of 1st and 2nd quadrant, complete hysteresis loop, recoil line
- Wide range of accessories for any sample shape or size

STANDARD CONFIGURATION

Cabinet containing:
Fluxmeters, power supply, heating unit and polarity switch

- Electromagnet + pole pieces
- Measuring coil
- Reference sample, for day-to-day control
- Dedicated software Xenon
- PC and printer

IMPROVEMENTS

With the NEW additional Iron Cobalt Pole pieces the peak of magnetic field density increases considerably: up to 3.2 T with a 2.5 mm fixed gap.

AMH-500 ACCESSORIES 1/4

LJ COMPENSATED COILS



To improve accuracy and resolution, our standard compensated coils measure the J-components with no dependency on the H field measurement. A second set of windings are used to measure the H field. Total B field is derived by the software ($B=H+J$).

THICKNESS 0,5 mm TEMPERATURE RANGE 10÷40°C

| TYPE | DIAMETER | USABLE POLES |
|--------|----------|--------------|
| LJX-10 | 10 mm | LP-60 |
| LJX-15 | 15 mm | LP-60 |

THICKNESS 1 mm TEMPERATURE RANGE 10÷40°C

| TYPE | DIAMETER | USABLE POLES |
|--------|----------|-------------------------|
| LJA-05 | 5 mm | LP-40, 60, 80, 100, 120 |
| LJA-10 | 10 mm | LP-60, 80, 100, 120 |
| LJA-15 | 15 mm | LP-60, 80, 100, 120 |
| LJA-26 | 26 mm | LP-60, 80, 100, 120 |
| LJA-42 | 42 mm | LP-80, 100, 120 |
| LJA-64 | 64 mm | LP-100, 120 |

THICKNESS 2,5 mm TEMPERATURE RANGE 100÷220°C

| TYPE | DIAMETER | USABLE POLES |
|---------|----------|-------------------------|
| LJT-05 | 5 mm | LP-40, 60, 80, 100, 120 |
| LJT-10 | 10 mm | LP-60, 80, 100, 120 |
| LJT-15 | 15 mm | LP-60, 80, 100, 120 |
| LJT-26 | 26 mm | LP-60, 80, 100, 120 |
| LJT-42 | 42 mm | LP-80, 100, 120 |
| LJT-64 | 64 mm | LP-100, 120 |
| LJT-73 | 73 mm | LP-120 |
| LJT-82 | 82 mm | LP-120 |
| LJT-100 | 100 mm | LP-135 |

LPH-200 SEARCH COIL



LPH-200 can be used alone or combined with embedded poles pieces.

| | |
|------------------------|----------------------|
| Typical magnetic area | 7000 mm ² |
| Stem length | 120 mm |
| Thickness | 2.5 mm |
| Active area (diameter) | 10 mm |

AMH-500 ACCESSORIES 2/4

LP IRON POLES



Several models of interchangeable pole pieces are available to ensure the best measurement accuracy. Pure iron pole caps guarantees an uniform field in the gap with a negligible residual field. Pole cap diameters smaller than 120 mm are tapered to concentrate the field produced by the electromagnet.

For example (up to 2.8 T in 2.5 mm gap with LP-60 Pole caps):

| TYPE | MAX Ø SAMPLE | USABLE COILS |
|--------|--------------|--------------|
| LP-40 | 15 mm | 5-15 |
| LP-60 | 26 mm | 5-26 |
| LP-80 | 42 mm | 5-42 |
| LP-100 | 73 mm | 5-73 |
| LP-120 | 82 mm | 5-82 |
| LP-135 | 100 mm | 100 |

See the Electromagnet part page 6.

LPC IRON COBALT POLES



In order to increase the magnetic field within the gap we have the option to substitute the LP Iron pole pieces with several models of interchangeable iron cobalt (Fe-Co) pole pieces (LPC).

For example:

| TYPE | MAX Ø SAMPLE | USABLE COILS |
|--------|--------------|--------------|
| LPC-40 | 15 mm | 5-15 |
| LPC-50 | 26 mm | 5-26 |
| LPC-60 | 26 mm | 5-26 |
| LPC-80 | 42 mm | 5-42 |

LP EMBEDDED COILS



Pole caps with a magnetic sensor embedded below the surface are available. The embedded coils are useful for large ferrite samples (for example loudspeakers magnet) or for deformable sample (bonded ferrite). These coils are Compensated coils for use with the H sensor, model LPH-200.

| TYPE | Ø POLE | Ø COIL | WEIGHT |
|-----------|--------|--------|--------|
| LP-80/9-9 | 80 mm | 10 mm | 6 kg |

AMH-500 ACCESSORIES 3/4

LPT HEATING POLES FOR HIGH TEMPERATURE MEASUREMENTS



Heated Pole caps enable measurements above 220 °C, meeting International Standard IEC/TR 61807.

Easy connection to the AMH-500 unit and electromagnet.

| | LPT-80 | LPT-100 | LPT 120 |
|---------------------|-----------|-----------|-----------|
| Temperature range | 20-220 °C | 20-220 °C | 20-220 °C |
| Diameter | 80 mm | 100 mm | 120 mm |
| Uniformity area | 45 mm | 75 mm | 95 mm |
| Field at 2,5 mm gap | 2.4 T | 2.2 T | 1.9 T |
| Weight | 6 kg | 10 kg | 13 kg |

KIT FOR FERRITE POWDERS MEASUREMENTS



The kit allows the measurement of ferrite magnetic powder at different pressures and densities. The powder is packed in a small case, pressed by accessories having different thicknesses. The various thicknesses result in different pressures and densities for the powder. The software Xenon records that data to enable the evaluation of the magnetic properties vs. density. Additional accessories need compensated coil LJT-26 or LJA-26.

SHAPED POLES FOR FERRITE ARC MAGNETS



Shaped pole pieces enable the non-destructive quality control of arc-shaped ferrite magnets. This eliminates the difficult task of cutting a regular-size sample from a fragile arc. The B measurement is performed by the coils wound around the pole piece, while the H measurement is performed by the sensor LPH-200. The curvature of arc magnets can vary depending on the application, Laboratorio Elettrofisico can provide custom pole pieces to conform your arc shapes.

The measurement is processed within a fixed gap without using a closed circuit set up. This configuration emulates the performance of the magnet in the final application (typically electric motors).

It's no longer necessary to cut measurement material samples from ARC shaped magnets.

AMH-500 ACCESSORIES 4/4

HYS REFERENCE SAMPLES



Reference samples are used for the day-to-day control of the Hysteresisgraph calibration. They can be used to validate other measuring systems. Reference samples are included with AMH-500 or available on demand in any size and material.

| MODEL | HYS-F | HYS-Nd | HYS-Al | HYS-Sm | HYS-Ni |
|----------|---------|--------|--------|--------|--------|
| MATERIAL | Ferrite | NdFeB | Alnico | SmCo | Nickel |

ELECTROMAGNET LEP/100-4S



The Laboratorio Elettrofisico electromagnet model LEP/100-4S is used in all AMH Hysteresisgraphs, for the measurement of hard magnetic materials and cemented carbides.

The model LEP/100-4S is a vertically oriented electromagnet fitted with a 120 mm diameter precision pole piece and with a continuously adjustable upper pole. This allows variation of the air gap from zero to 80 mm for maximum versatility. The pole piece is locked in place by a socket head screw located on the top portion of the yoke frame. Its special design enables to use the electromagnet without any cooling for a moderate working power level. The coils can be electrically connected to any DC power source.

A set of tapered pole pieces with various diameter allows different combinations of field amplification and uniformity: LP-40, LP-60, LP-80, LP-100, LP-120 (number indicates the pole's diameter, in mm). Special temperature poles are also available. They provide a heating surface for experiments and measurements at temperatures up to 220 °C.

AVAILABLE POLES

| IRON POLES | IRON COBALT POLES | HEATING POLES | EMBEDDED COILS |
|------------|-------------------|---------------|----------------|
| LP-40 | LPC-40 | LPT-80 | LP80/9-9 |
| LP-60 | LPC-50 | LPT-100 | |
| LP-80 | LPC-60 | LPT-120 | |
| LP-100 | LPC-80 | | |
| LP-120 | | | |
| LP-135 | | | |


ELECTROMAGNET TECHNICAL SPECS

| | |
|-------------------------------|--------------------|
| SHAFT'S DIAMETER | 120 mm - 4.72" |
| COIL'S RESISTANCE (TWO COILS) | 2.4 Ω |
| MAX EXCURSION (WITHOUT POLES) | 80 mm - 3.15" |
| COOLING | Static air |
| MAX CURRENT | 25 A |
| LOCK | Included |
| EXTERNAL DIMENSIONS | 328 x 388 x 491 mm |
| INTERCOIL SPACING | 135 mm - 5.31" |
| WEIGHT | 330 kg - 726 lb |

AMH - 500 FIELD DIAGRAMS

IRON POLES (LP)

LP-40

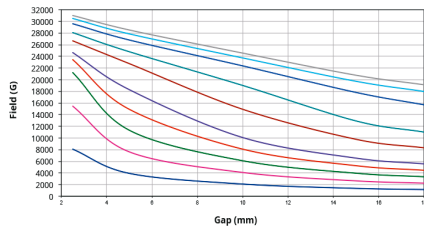


POLES LP-40

Diameter 40 mm
Gap adj. 0-25 mm

Current 25 A:
H @ 2.5 mm 3.10 T
H @ 5 mm 2.85 T
H @ 15 mm 2.08 T

LP-60

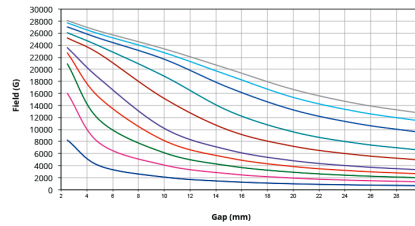


POLES LP-60

Diameter 60 mm
Gap adj. 0-30 mm

Current 25 A:
H @ 5 mm 2.63 T
H @ 10 mm 2.34 T
H @ 20 mm 1.67 T

LP-80

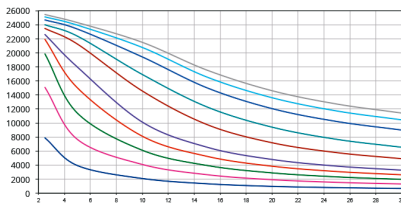


POLES LP-80

Diameter 80 mm
Gap adj. 0-50 mm

Current 25 A:
H @ 5 mm 2.43 T
H @ 10 mm 2.15 T
H @ 20 mm 1.46 T

LP-100

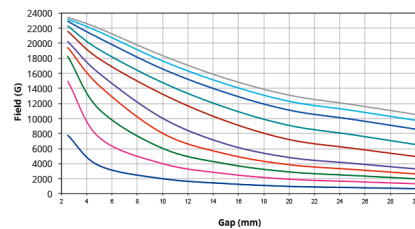


POLES LP-100

Diameter 100 mm
Gap adj. 0-60 mm

Current 25 A:
H @ 5 mm 2.20 T
H @ 10 mm 1.84 T
H @ 20 mm 1.31 T

LP-120

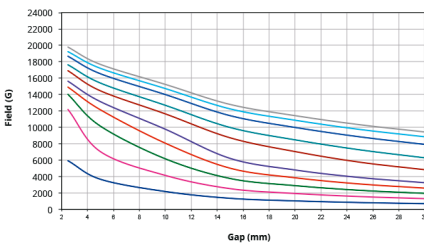


POLES LP-120

Diameter 120 mm
Gap adj. 0-60 mm

Current 25 A:
H @ 5 mm 1.77 T
H @ 10 mm 1.52 T
H @ 20 mm 1.14 T

HEATING POLES (LPT)

LPT-80 poles

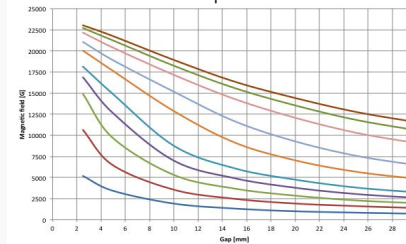


POLES LPT-80

Diameter 80 mm
Gap adj. 0-50 mm

Current 25 A:
H @ 5 mm 2.17 T
H @ 10 mm 1.89 T
H @ 20 mm 1.44 T

IRON COBALT POLES (LPC)

LPC-40 poles

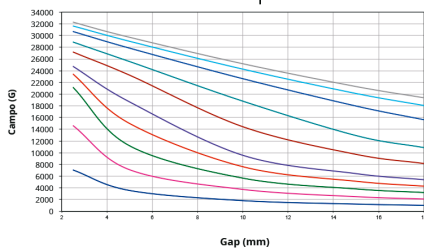


POLES LPC-40

Diameter 40 mm
Gap adj. 0-25 mm

Current 25 A:
H @ 2.5 mm 3.22 T
H @ 5 mm 2.97 T
H @ 15 mm 2.13 T

LPC-60 poles

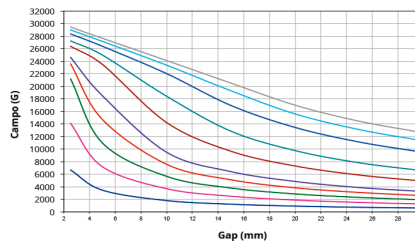


POLES LPC-60


Diameter 60 mm
Gap adj. 0-30 mm

Current 25 A:
H @ 5 mm 2.77 T
H @ 10 mm 2.41 T
H @ 20 mm 1.70 T


AMH-500 SOFTWARE XENON

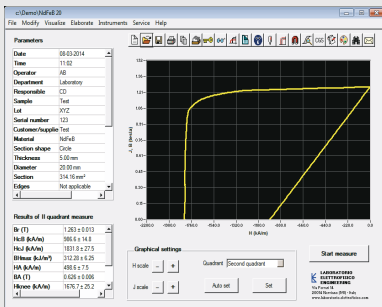

Set of curves at different temperature and thermal coefficient evaluation

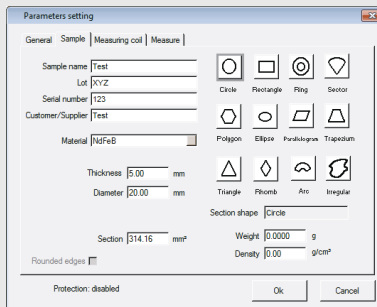

Parameters set, results and graph

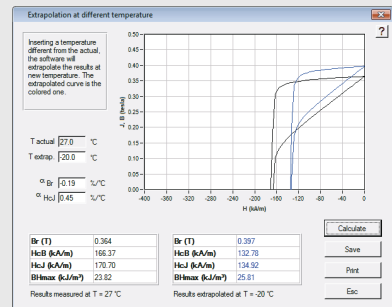

Curve extrapolation at a lower or higher temperature to evaluate the T behaviour of the magnet without making the measurement at high or low T

Xenon is a powerful software to manage automatically the measurement and many useful options, such as printing report, database, statistic analysis, etc. It also provides additional help to overcome several physical limitations; extrapolation of the curve at higher or lower temperatures, interpolation of the curve when incomplete or irregular, curve's completion for high-coercivity magnets, etc. This operating software maintains the overall accuracy controlling all the parameters to ensure the measurement is precise and to prevent operating errors.

FEATURES

TYPE OF MEASUREMENT

- 1st quadrant, 2nd quadrant, 1st and 2nd quadrant
- Complete hysteresis cycle
- Recoil permeability

SETTING OF MEASURING PARAMETERS

- Manual or automatic settings of magnetizing and demagnetizing field, speed, resolutions and many other parameters
- Setting of thresholds for direct quality control

RESULTS

- Br, HcJ, HcB, BHmax, BA, HA, HKnee, Hsat Jsat, Bsate, recoil permeability, magnetic moment, anisotropy parameters, load line, working point, T in °C and °F
- Magnetic units in SI and CGS, measures in mm and inches, temperature in °C and °F

AMH-500 SOFTWARE XENON

FEATURES

DATA PROCESSING

- Curve comparison
 - Curve extrapolation at higher or lower temperature, for a quick evaluation of the measured curve at different T
 - Curve's interpolation, automatic or using a mathematical function from a list
 - Extrapolation of uncompleted curves (high-HcJ materials)
 - Correction of pole pieces' saturation
 - Processing of curves made with shaped poles
 - Automatic control of the Fluxmeter's drift
-

PRINTING A REPORT

- 6 pre-set reports with different sizes and contents
 - Customized report option for changing the information and the language: 10 languages available for printing (European languages + Chinese & Hindi)
 - Direct print or automatic creation of graphical and/or text file
 - Reports can be edited
-

DATA BASE AND FILE SEARCHING

- Data base of measuring files with fast search options, ordering, selection, etc.
 - Full compatibility with other programs, such as Microsoft Excel™
-

PROTECTION

- Password protection for restricting access according to selected parameters.
-

SET OF MEASURES

- Ability to group together different measurements in the same graph. The software recognizes the group type and provides additional results such as statistical data, i.e. the average, standard deviation, etc.
-

TECHNICAL SPECIFICATIONS 1/2

GENERAL

MEASURABLE MATERIALS

Alnico, Ferrite, NdFeB, SmCo5, Sm2Co17, bonded magnets

IMPORTANT NOTE: rare earth magnets need to be saturated externally (for ex. with a pulse magnetizer)

MEASURABLE QUANTITIES

Br, HcB, HcJ, BHmax, Hknee, HA, BA, μ recoil, Jsat, Hsat, temperature coefficients α Br, α HcJ, load line, working point, squareness, etc.

MEASURABLE SHAPES

Cylinder, parallelogram, ring, any prism with parallel bases

SAMPLE SIZE

Diameter or diagonal from 3 to 82 mm, height from 0.5 to 50 mm

ACCURACY

Br \pm 1%, HcB, HcJ \pm 1.5%, BHmax \pm 2%

MAX H FIELD

Up to 3.2 T (2.560 kA/m) with 40 mm poles at 2.5 mm gap

TEST TIME

Less than 30 seconds

MAIN ELECTRICAL CABINET

VOLTAGE

220 V (+10%) single-phase + ground, 50-60 Hz, 16 A max

POWER

3 kVA

DIMENSIONS

L 543 x W 610 x H 420 mm - L 21" x W 24" x H 16,5"

WEIGHT

58.5 kg - 129.3 lb

FLUXMETER DF (2 UNITS)

RANGES

(1, 2, 5, 10, 20, 50, 100) x 2000 μ Wb

RESOLUTION

from 1 μ Wb (range 1) to 100 μ Wb (range 100)

ACCURACY

\pm 0.5%

DRIFT

Less than 1 digit/minute

INPUT IMPEDANCE

10 k Ω x range

TECHNICAL SPECIFICATIONS 2/2

MAGNETIC YOKE LEP/100-4 S

POLES DIAMETER

120 mm - 4.72"

MAXIMUM AIR GAP

80 mm - 3.14"

MAX FIELD INTENSITY

see diagrams

MOVEMENT OPERATING

Manual

POLES PIECES SETTING

Micrometric

DIMENSIONS (EXCLUDED UPPER POLES ADJUSTMENT)

330 x 410 x 491 mm - 12.9" x 16.1" x 19.3"

WEIGHT

350 kg (approx) - 780 lb






CONTACT US

www.laboratorio.elettrofisico.com

ITALY HQ

 Via G. Ferrari 14, 20014, Nerviano
 +39 0331 589785
 italy@elettrofisico.com




USA

 40 Engelwood Dr., Lake Orion, MI
 +1 248 340 7040
 usa@elettrofisico.com

CHINA

 Suit 2605, 360 Chang Shou Lu, Shanghai
 +86 136 7195 1275
 china@elettrofisico.com

VIETNAM

 8th floor Anh Minh Building, Hanoi
 +86 136 7195 1275
 vietnam@elettrofisico.com